



FLO

Float switch for clear water, **MADE IN ITALY, with CE certification.**

Controls pump operation according to liquid level. Dimensions suitable for every application.



Pumps Residential



APPLICATIONS:

- Pumping stations
- Level control in tanks, cisterns for clean water, rainwater, and drainage
- High level alarm switch
- Dry operation protection for low level detection
- Suitable for pumps up to 2 Hp.

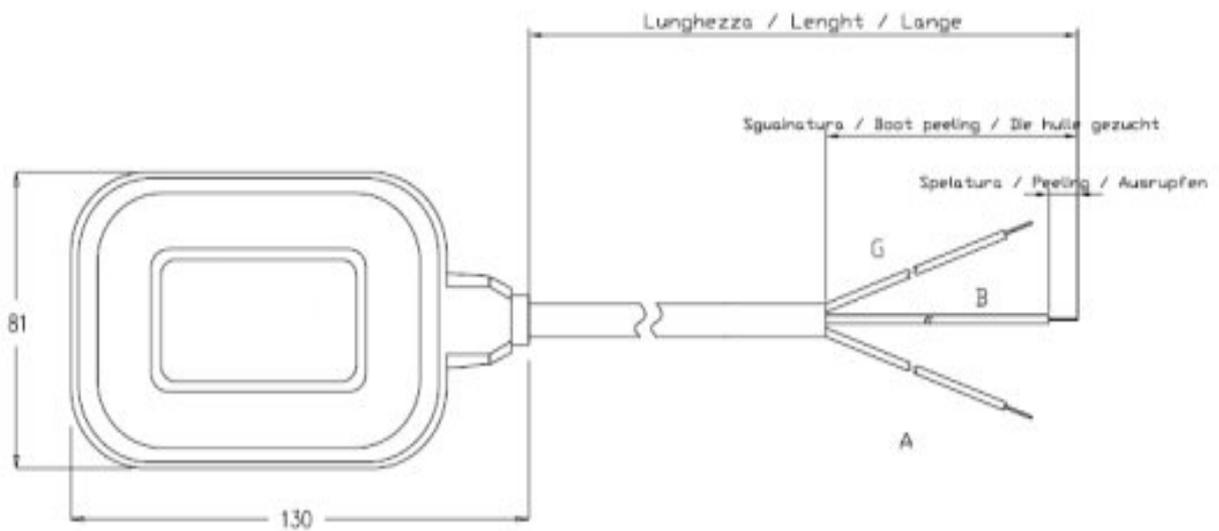


Technical Specification:

Microswitch type	16(4)A 250 V~
Max fluid temp.	+50°C
Switching angle	±45°
Dimensions	81x130x43,2 mm – volum 280m ³
Weight (without cable)	157 gr (without cavo)
Insulation grade	IP68
Nominla pressure	1,5 bar
Material	Atoxic Polypropylene (PP)
Cable Type	PVC 3X1 7mm

Counterweight gray

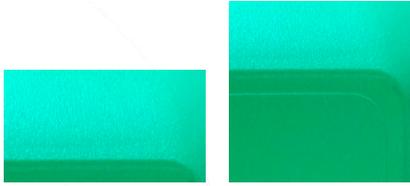
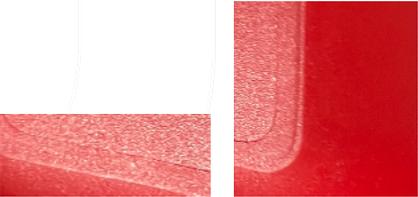
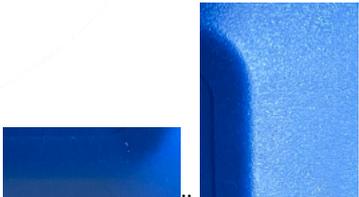




Sguainatura Boot peeling						Spelatura Peeling					
A	Brown	mm.	60	±	5	mm.	mm.	10	±	2	mm.
B	Blue	mm.	60	±	5	mm.	mm.	10	±	2	mm.
G	Black	mm.	60	±	5	mm.	mm.	10	±	2	mm.

Customisation:

Colour palette for customising the FLO float

Color shell	Palette	Performance on plastic
green		
red		
blue		
Light blue		

Belt BLACK



Counterweight gray



Public Price list:

Meter cable	Code	Price list	With counterweight
1	Z€D1006NNO	8,13 €	9,26 €
2	Z€M0206NNO	9,43 €	10,56 €
3	Z€M0306NNO	11,00 €	12,13 €
5	Z€M0506NNO	12,89 €	14,02 €
10	Z€M1006NNO	20,03 €	21,16 €
15	Z€M1506NNO	26,75 €	27,88 €
20	Z€M2006NNO	33,16 €	34,29 €

MOQ full container.