



## SMART

Float switch for clear water, **MADE IN ITALY**, with TUV homologation and CE certification.

Controls pump operation according to liquid level. Dimensions suitable for every application.



Pumps Residential



### APPLICATIONS:

- Pumping stations
- Level control in tanks, cisterns for clean water, rainwater, and drainage
- High level alarm switch
- Dry operation protection for low level detection
- Suitable for pumps up to 2 Hp.




### Technical Specification:

Microswitch type	20(8)A 250 V~
Max fluid temp.	+50°C
Switching angle	±45°
Dimensions	81x130x43,2 mm – volum 280m <sup>3</sup>
Weight (without cable)	157 gr (without cavo)
Insulation grade	IP68
Nominla pressure	1,5 bar
Material	Atoxic Polypropylene (PP)
Cable Type	PVC 3X1, H07RN-F 3x1, H07RN-F 3G1,

Counterweight yellow



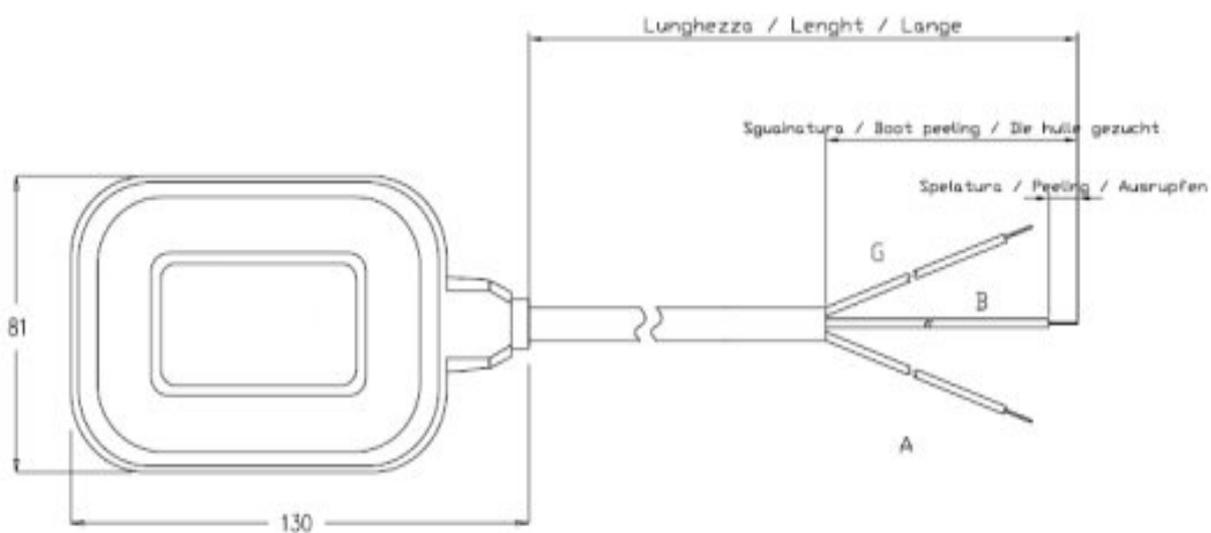

Sguainatura Boot peeling						Spelatura Peeling					
A	<b>Brown</b>	mm.	<b>60</b>	±	5	mm.	mm.	<b>10</b>	±	2	mm.
B	<b>Blue</b>	mm.	<b>60</b>	±	5	mm.	mm.	<b>10</b>	±	2	mm.
G	<b>Black</b>	mm.	<b>60</b>	±	5	mm.	mm.	<b>10</b>	±	2	mm.

## Public Price list:

Meter cable	Code	Price list	With counterweight
1	XPM0106LN0	9,15 €	10,65 €
2	XPM0206LN0	10,64 €	12,14 €
3	XPM0306LN0	12,45 €	13,95 €
5	XPM0506LN0	14,62 €	16,12 €
10	XPM1006LN0	22,83 €	24,33 €
15	XPM1506LN0	30,56 €	32,06 €
20	XPM2006LN0	37,93 €	39,43 €